


CONCRETE

Slump Test Set Pro

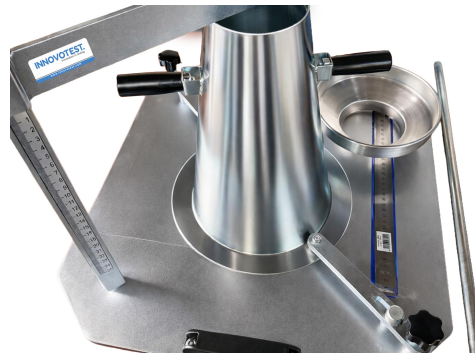

The Slump test method is used for the determination of the consistency and workability of fresh concrete. Slump Test Sets are supplied galvanized to prevent corrosion.

Technical Specifications

Slump cone (300 x 200 x 100 mm)

Plate (500 x 500 x 20 mm)

Funnel

Tamping Rod (16 x 600 mm)

Plastic hammer

steel ruler (30 cm)

Measurement Attachment (30 cm)

You May Also Be Interested In



Kelly Ball Apparatus

PCO-205



**Concrete Schmidt Hammer N
Type**

PCO-500.1



Curing Tank

PCO-221

Review Product on Our Website

To access up-to-date technical details, images, and documentation for this product, you can scan the QR code on the right using your smartphone camera or visit our website directly.

