


CONCRETE

SCC - J-Ring, Narrow Gap

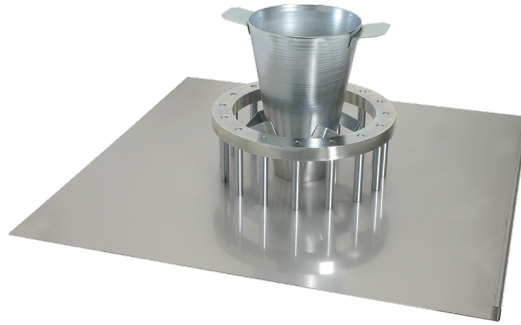

The J-Ring Test is used for determining the passing ability, the flow spread and the flow time of self compacting concrete as the concrete flows through the J-Ring Apparatus. J-Ring Narrow Gap with Ø18mm x 16 smooth bars is manufactured from stainless steel.

Slump Cone is made from sheet steel protected against corrosion, with diameters; top 100 mm, base 200 mm and with a height of 300 mm.

You May Also Be Interested In




Concrete Mixer Pan Type

PCO-224



SCC - V Funnel

PCO-209



**Servo Electromechanical
Universal Compression.**

PCO-EF.CE Series

Review Product on Our Website

To access up-to-date technical details, images, and documentation for this product, you can scan the QR code on the right using your smartphone camera or visit our website directly.

