


CONCRETE

Slump Test Set

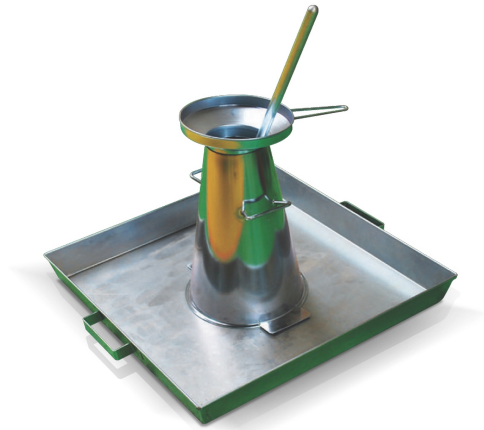

The Slump test method is used for the determination of the consistency and workability of fresh concrete. Slump Test Sets are supplied galvanized to prevent corrosion.

Technical Specifications

Slump cone (300 x 200 x 100 mm)

Plate (500 x 500 x 20 mm)

Funnel

Tamping Rod (16 x 600 mm)

Plastic hammer

steel ruler (30 cm)

You May Also Be Interested In



**Water Impermeability
Apparatus**

PCO-225



Concrete Mixer Pan Type

PCO-224



Concrete Pipe Testing Machines

PCO-HPT

Review Product on Our Website

To access up-to-date technical details, images, and documentation for this product, you can scan the QR code on the right using your smartphone camera or visit our website directly.

